

CONGELATORI A POZZETTO

CHEST FREEZER



CHFPC500EKO

Congelatore statico a pozzo porta cieca battente.
Static chest freezer with solid hinged lids.



CHFPC600EKO

Congelatore statico a pozzo porta cieca battente.
Static chest freezer with solid hinged lids.






Chiave e serratura
Lock and key



Regolatore di temperatura meccanico
Mechanical controller



Ruote
Castors

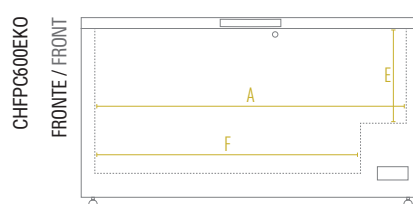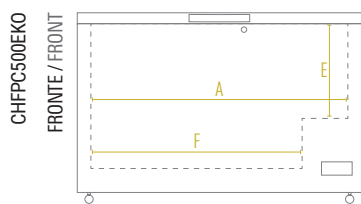

Dimensioni mm / Dimensions mm	CHFPC500EKO	CHFPC600EKO
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1305 x 720 x 845	1555 x 720 x 845
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1360 x 760 x 990	1610 x 760 x 990
A - Larghezza / Width	1180	1430
B - Profondità / Depth	510	510
C - Altezza / Height	675	675
E - Altezza Minima / Min. Height	445	445
F - Larghezza Minima / Min. Width	970	1220
Adesivo Laterale Destro / Side Right Sticker	625 x 487	625 x 487
Adesivo Laterale Sinistro / Side Left Sticker	625 x 750	625 x 750
Adesivo Frontale / Front Sticker	1295 x 750	1545 x 750

Caratteristiche Tecniche / Technical Features	CHFPC500EKO	CHFPC600EKO
Temperatura / Temperature Range	-24 °C / -18 °C	-24 °C / -18 °C
Classe Climatica / Climate Class	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 373 / 391	Lt. 458 / 479
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium
Cestelli / Baskets	Optional (max 5 pz / max 5 pcs)	Standard 3 pz / 3pcs + Optional (max 6 pz / max 6 pcs)
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical
Rumorosità / Noise level	dB 40	dB 40
Spessore isolamento / Insulation thickness	mm 60	mm 60
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual
Illuminazione coperchio / Lid lighting	-	-
Chiave e serratura / Lock and key	Si / Yes	Si / Yes
Ruote-Piedi / Castors-Feet	4 Ruote / 4 Castors	4 Ruote / 4 Castors
Peso Netto-Lordo / Net-Gross Weight	Kg 58 / 68	Kg 67 / 76
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R290
Assorbimento / Absorption	W 257	W 255
Consumo Energia / Energy Consumption	KwH/24H 1,99	KwH/24H 2,28