

# CONGELATORI A POZZETTO

## CHEST FREEZER



### CHFPV300EKO

Congelatore statico a pozzo vetro piatto scorrevole.  
Static chest freezer with flat sliding glass lids.

### CHFPV400EKO

Congelatore statico a pozzo vetro piatto scorrevole.  
Static chest freezer with flat sliding glass lids.




### CHFPV500EKO

Congelatore statico a pozzo vetro piatto scorrevole.  
Static chest freezer with flat sliding glass lids.






Ruote  
Castors

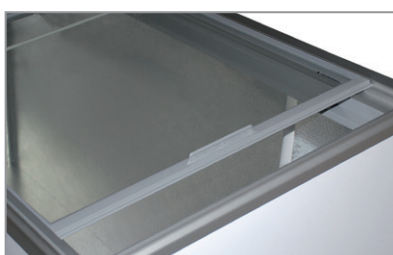

Vetro piatto scorrevole  
Flat sliding glass lids



Termometro analogico  
Analogue thermometer

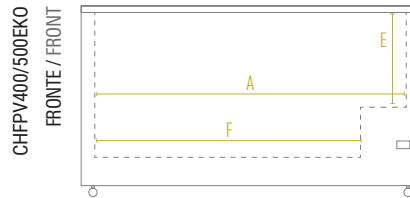

Dimensioni mm / Dimensions mm	CHFPV300EKO	CHFPV400EKO	CHFPV500EKO
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1015 x 635 x 875	1305 x 635 x 875	1555 x 635 x 875
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1065 x 695 x 960	1355 x 695 x 960	1605 x 695 x 960
A - Larghezza / Width	890	1180	1430
B - Profondità / Depth	510	510	510
C - Altezza / Height	665	665	665
E - Altezza Minima / Min. Height	435	435	435
F - Larghezza Minima / Min. Width	680	970	1220
Adesivo Laterale Destro / Side Right Sticker	625 x 487	625 x 487	625 x 487
Adesivo Laterale Sinistro / Side Left Sticker	625 x 750	625 x 750	625 x 750
Adesivo Frontale / Front Sticker	1005 x 750	1295 x 750	1545 x 750

Caratteristiche Tecniche / Technical Features	CHFPV300EKO	CHFPV400EKO	CHFPV500EKO
Temperatura / Temperature Range	-23 °C / -13 °C	-23 °C / -13 °C	-23 °C / -13 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 261 / 303	Lt. 355 / 410	Lt. 436 / 503
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna Inner Liner	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium
Cestelli Baskets	Optional (max 3 pz / max 3 pcs)	Optional (max 5 pz / max 5 pcs)	Optional (max 6 pz / max 6 pcs)
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura Controller	Meccanico Mechanical	Meccanico Mechanical	Meccanico Mechanical
Spessore isolamento / Insulation thickness	mm 60	mm 60	mm 60
Sbrinatorio / Defrost	Manuale / Manual	Manuale / Manual	Manuale / Manual
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes
Ruote-Piedi / Castors-Feet	4 Ruote / 4 Castors	4 Ruote / 4 Castors	4 Ruote / 4 Castors
Peso Netto-Lordo / Net-Gross Weight	Kg 56 / 63	Kg 66 / 76	Kg 71 / 85
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290	R290
Assorbimento / Absorption	W 237	W 256	W 257
Consumo Energia / Energy Consumption	KwH/24H 3,85	KwH/24H 4,66	KwH/24H 5,36