CHF 611 TOP COMPACT CHEFOR


















Electric COMPACT combi oven with touch screen 6 trays 1/1 GN

Although it is just 50 cm wide, it encloses all the potential to achieve optimal cooking uniformity. A compact, fast, intuitive and simple oven. Designed for restaurants and delicatessens, which must combine all the technology of a cutting-edge product with limited kitchen space. Like all those in the Millennial range, the oven has IPX5 water protection rating. The oven also offers the multi-point core probe and integrated automatic wash as standard. Maximum efficiency in minimum space.

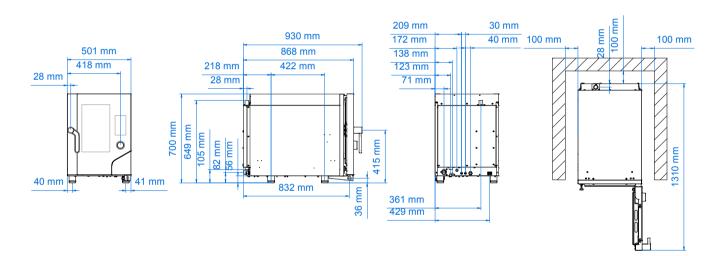

Dimensional features

| Dimensions (WxDxH mm) | 500 x 930 x 700 |
|----------------------------------|-----------------|
| Weight (kg) | 65 |
| Distance between rack rails (mm) | 68 |
| | |

Electrical features

| Electrical features | |
|--------------------------|-----------------|
| Power supply (kW) | 7,8 |
| Frequency (Hz) | 50/60 |
| Voltage (V) | AC 380/400 3N |
| N° motors | 1 bidirectional |
| Boiler (kW) | / |
| Protection against water | IPX5 |
| | |

Eupstional foatures

| Functional features | |
|----------------------------|--|
| Power | Electricity |
| Capacity | N° 6 trays/grids 1/1 GN |
| Type of cooking | Semistatic + ventilated |
| Steam | Direct steam controlled by touch screen (10 levels) |
| Cooking chamber | AISI 304 stainless steel |
| Temperature | 30 - 270 ℃ |
| Temperature control | Digital probe thermometer |
| Control panel | Touch screen |
| N° programs | 500 |
| Programmable cooking steps | 10 |
| Pre-heating temperature | 180 ℃ |
| Pre-heating function | Programmable |
| Door | Right side opening Ventilated Inspectionable glass |
| Modularity | Yes |
| Feet | Adjustable |

Equipment

| Cardboard box dimensions with pallet (WxDxH mm) | 570 x 980 x 870 mm |
|---|---|
| Lateral supports | 1 right + 1 left |
| Cable | Three-phase+neutral [5G 2,5]-L=1600 mm |
| USB port | |
| Multipoint core probe cod. MKSCMU | |
| Plug for "vacuum cooking" probe cod. Mk | SCSV |
| Automatic washing system integrated | |
| Condensate collection bowl, with drain or | n door |
| Hinge with door locking for openings adj | usted at 60°, 90°, 120°, 180° |

Plus

HACCP system Adjustable door hinges

| Patented fan guard system Airflo | wlogic™ |
|------------------------------------|---|
| Patented system for direct steam I | Humilogic™ |
| Patented system for cooking chan | nber drying Drylogic™ |
| Available on request at the order | Voltage (V) : AC 220/230 3 |
| | Voltage (V) : AC 220/230 |
| | Left side opening door |
| Humidity management software | |
| Wi-Fi communication system | |
| Knob for quick selection of the to | uch screen |
| Programmable oven start | |
| N ° 40 recipes stored | |
| | n, Croatian, Danish, Philippine, Finnish, glish, Icelandic, Italian, Kazakh, Lithuanian, n, Portuguese, Romanian, Russian, Serbian, |