# **CHF 711 TOP**




















# Gas combi oven 7 trays 1/1 GN with touch

## screen

Minimal and elegant design for a professional oven that combines functionality and technological innovations that always go toward the best quality of work in the kitchens. Designed for medium-sized restaurants and delis that need to cook even sophisticated dishes easily and intuitively. The oven is equipped with an innovative cooling system that ensures operation even in the smallest environments and a new washing system with smaller dimensions, less energy consumption and more efficiency.





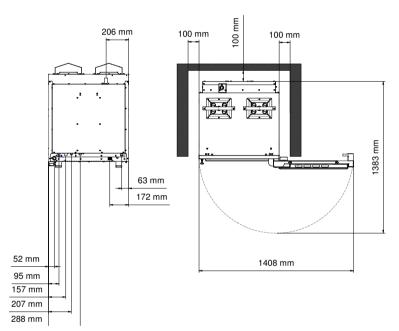

# **Dimensional features**

Dimensions (WXDXH mm)	/30 x 850 x 950
Weight (kg)	107,5
Distance between rack rails (mm)	68
Electrical features	
Thermal supply (kW)	13
Frequency (Hz)	50/60
Voltage (V)	AC 220/230
N° motors	2 bidirectional
Boiler (kW)	/

### Eupstional foatures

Protection against water

Functional features	
Power	Multigas (tested for natural gas)
Capacity	N° 7 trays/grids 1/1 GN
Type of cooking	Semistatic + ventilated
Steam	Direct steam controlled by touch screen (10 levels)
Cooking chamber	AISI 304 stainless steel
Temperature	30 - 260 °C
Temperature control	Digital probe thermometer
Control panel	Touch screen
N° programs	500
Programmable cooking steps	10
Pre-heating temperature	180 °C
Pre-heating function	Programmable
Door	Right side opening
	Ventilated
	Inspectionable glass
Feet	Adjustable

### **Equipment**

with pallet (WxDxH mm)	790 x 905 x 1020 mm	
Lateral supports	1dx + 1sx	
Cable	Single-Phase [3G 1,5]-L=1600 mm	
USB port		
Multipoint core probe cod. MKSCMU		
Support for core probe cod. MKSSC/	'A	
Automatic washing system integrated		
Condensate collection bowl, with drain on door		
Hinge with door locking for openings adjusted at 60°, 90°, 120°, 180°		
Nozzle for LPG		

HACCP system Adjustable door hinges

Regulation 2016/426/UE

IPX3

Patented fan guard system <b>Airflowlogic™</b> Patented system for direct steam <b>Humilogic™</b> Patented system for cooking chamber drying <b>Drylogic™</b>			
		Available on request at the order	Left side opening door
		Humidity management software	
Wi-Fi communication system			
Knob for quick selection of the touch scr	een		
Programmable oven start			
N ° 40 recipes stored			
Control panel in 42 languages: Arabic, Armenian, Azerbaijani, Bahasa (Indones Bulgarian, Chinese, Croatian, Czech, Danish, Du French, Georgian, German, Greek, Hungarian, Ic Latvian, Lithuanian, Norwegian, Persian (Iran), P Romanian, Russian, Serbian, Slovenian, South K Turkish, Ukrainian, Vietnamese	utch, English, Estonian, Finnish, celandic, Italian, Japanese, Kazakh, Philippine, Polish, Portuguese,		