CHF 1011 DGT COMPACT CHEFOR




















Electric COMPACT combi oven 10 trays 1/1 GN with BLACK MASK

The new design is helps simplify the use of the oven in everyday life, with all the cooking being controlled from the BLACK MASK panel.

In the CHF 1011 DGT COMPACT compact oven you can use up to 10 1/1 GN trays in just 50 cm of width!

428 mm

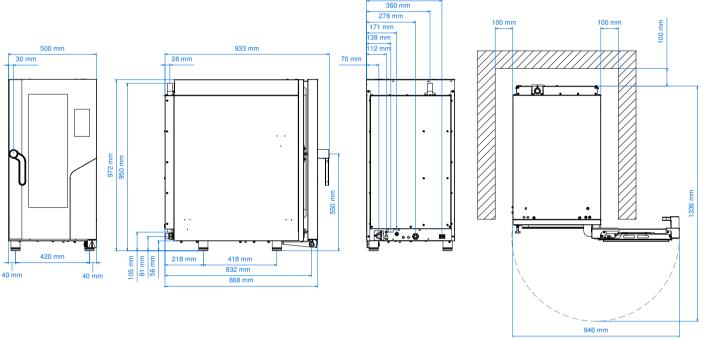

Dluc

Patented fan guard system Airflowlogic™ Patented system for direct steam Humilogic™		
Left side opening door *		
Humidity management software		
Programmable oven start		
N ° 40 recipes stored		
HACCP system		
Adjustable door hinges		

Equipment

Cardboard box dimensions with pallet (WxDxH mm)	570 x 980 x 1140
Lateral supports	1 right + 1 left
Cable	Three-phase+neutral [5G 6]-L=1600 mm
USB port	
Single-point core probe coo	d. MKSCMO
Support for core probe cod.	.MKSSC/A
Automatic washing system	integrated
Condensate collection bow	l, with drain on door
Hinge with door locking for	openings adjusted at 60°, 90°, 120°, 180°

Dimensional features

Dimensions (WxDxH mm)	500 x 930 x 970
Weight (kg)	95,2
Distance between rack rails (mm)	68

Electrical features

Power supply (kW)	15,4
Frequency (Hz)	50/60
Voltage (V)	AC 380/400 3N
N° motors	2 bidirectionals
Boiler (kW)	/
Protection against water	IPX4

Functional features

Feet

i diletional leatures	
Power	Electricity
Capacity	N° 10 trays/grids 1/1 GN
Type of cooking	Semistatic + ventilated
Steam	Direct steam controlled by touch panel (10 levels)
Cooking chamber	AISI 304 stainless steel
Temperature	30 - 270 °C
Temperature control	Digital probe thermometer
Control panel	Black mask electronic control
N° programs	100
Programmable cooking steps	10
Pre-heating temperature	180 °C
Pre-heating function	Programmable
Door	Right side opening Ventilated Inspectionable glass

Adjustable